

ELK FALLS
HARDWOOD
GENUINE APPALACHIAN HICKORY

HICKORY



 *by*
PREFERENCE
FLOORS



HICKORY
HARDWOOD
IT'S HARD
TO BEAT


TOASTED RYE

ELK FALLS

– GENUINE APPALACHIAN HICKORY

Elk Falls Hickory planks are manufactured from genuine North American Appalachian Hickory. It is an excellent durable hardwood ideally suited to flooring installations where strength & impact resistance are important considerations. Elk Falls Hickory flooring, a great choice for the rough and tumble of everyday life.



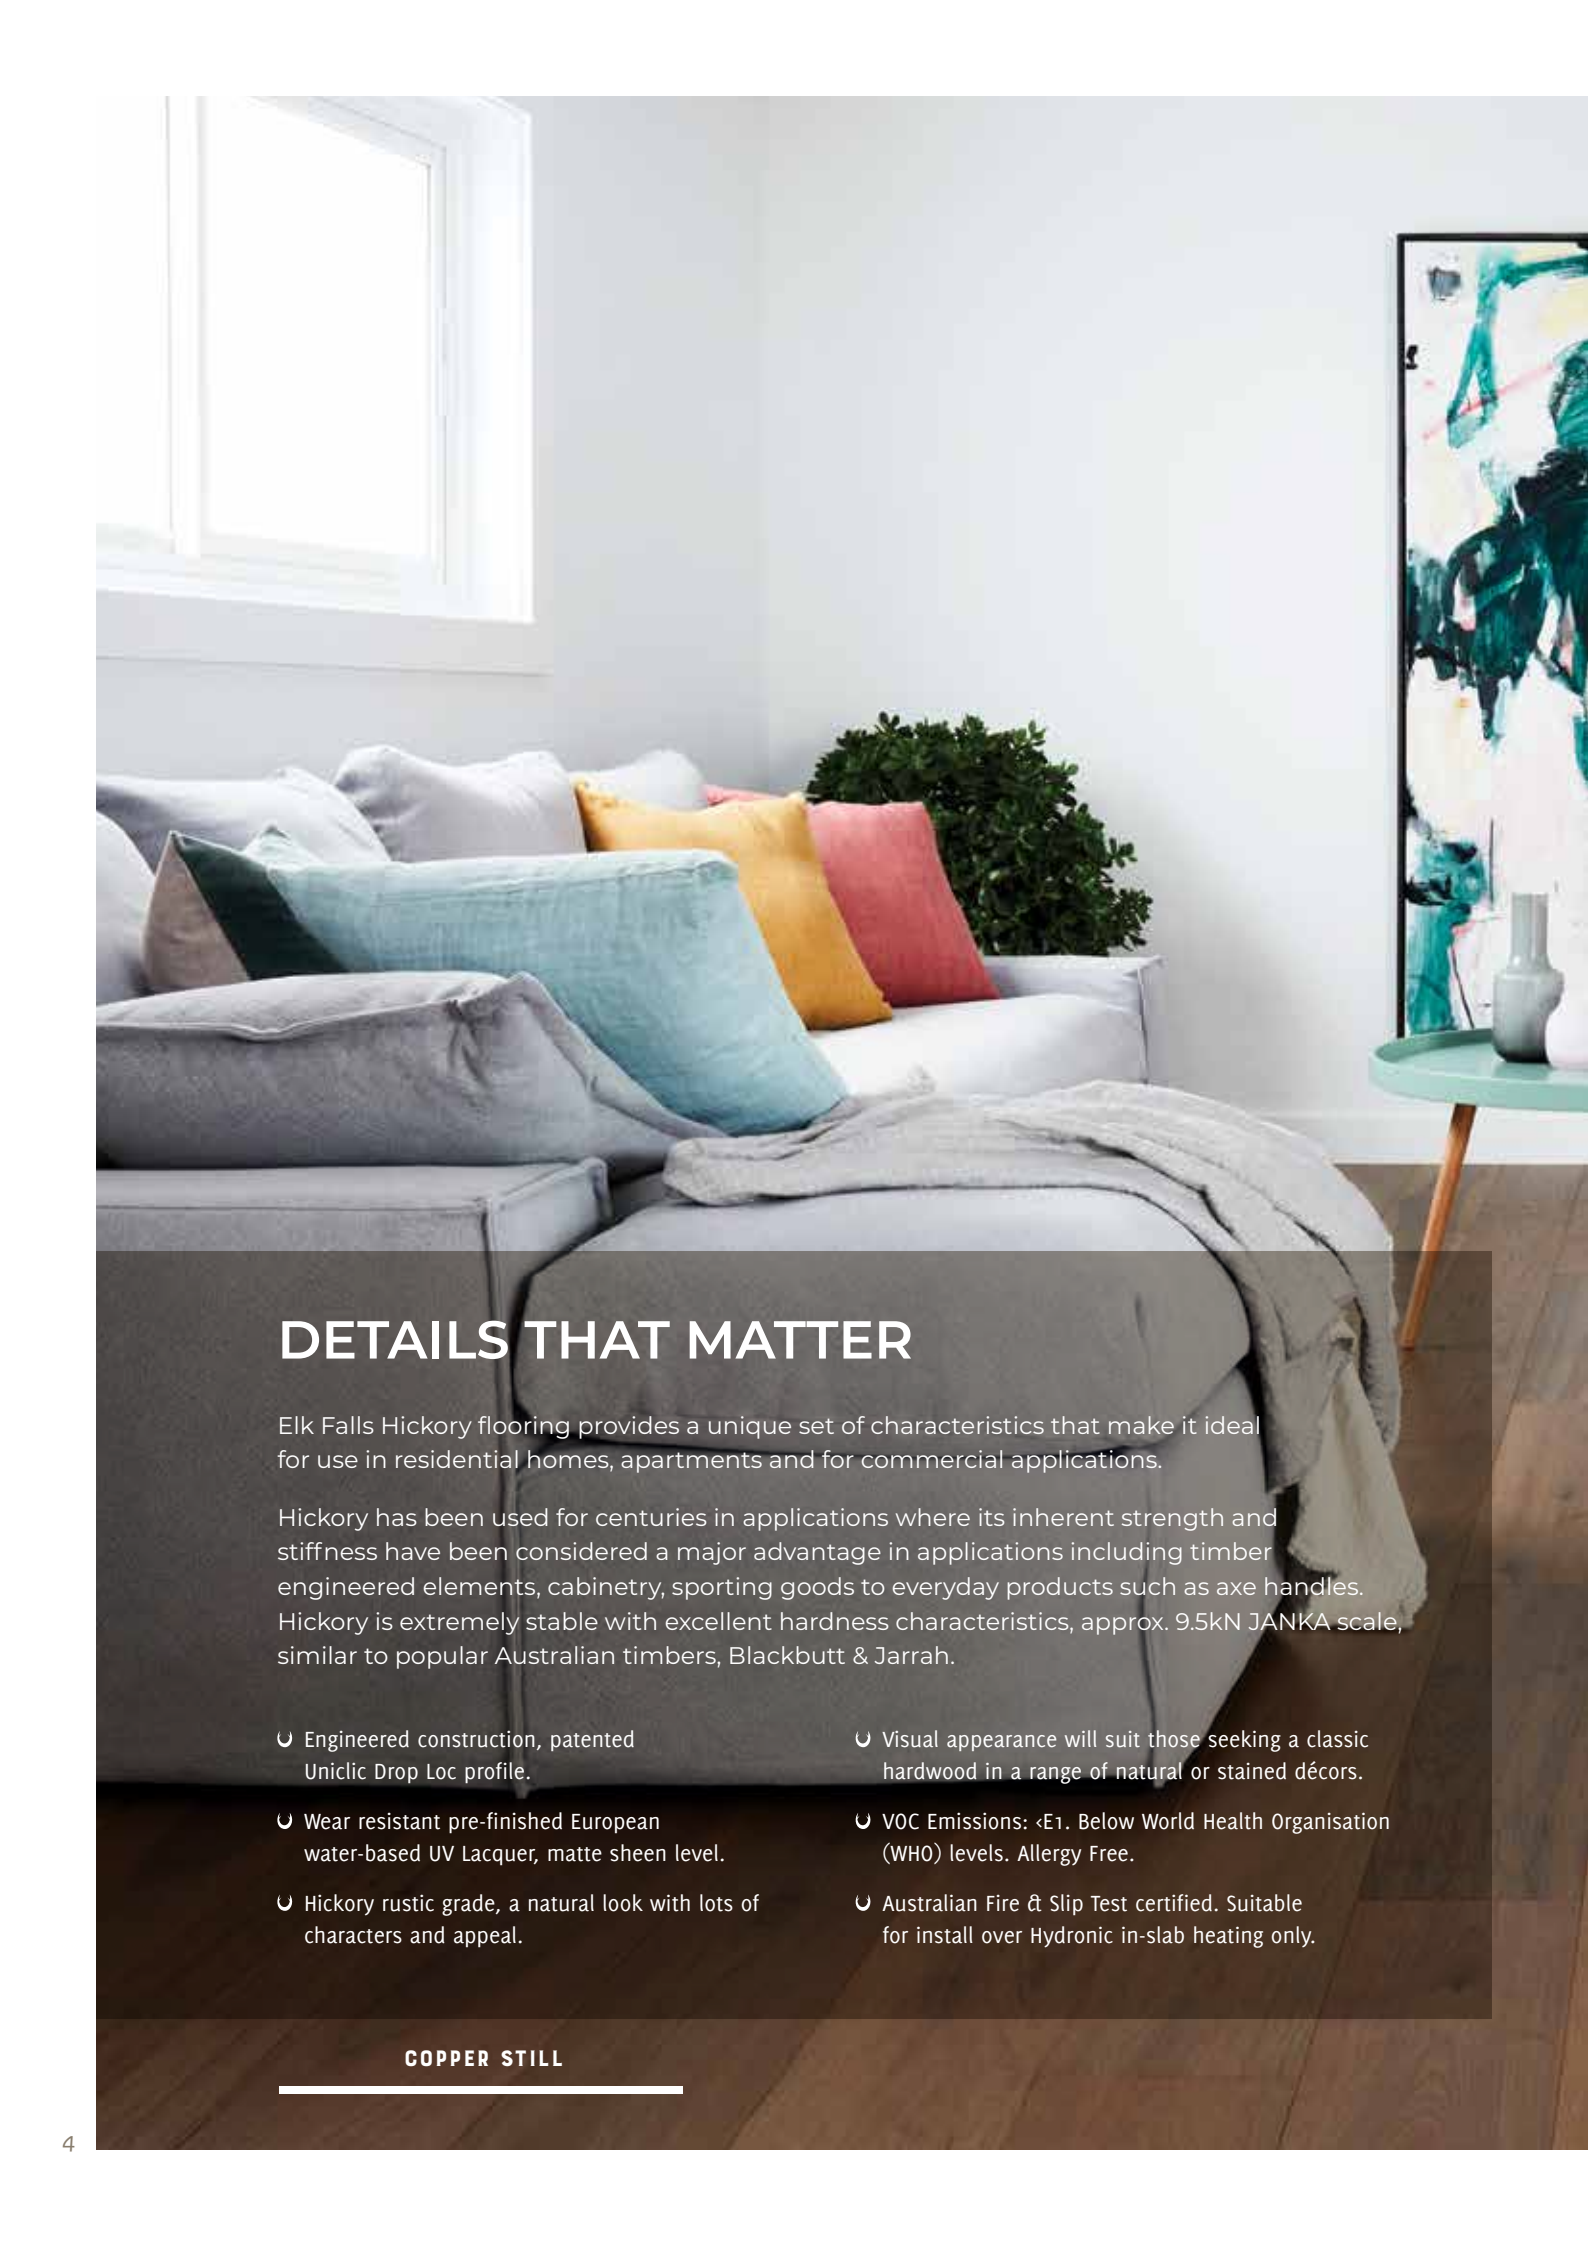

DETAILS THAT MATTER

Elk Falls Hickory flooring provides a unique set of characteristics that make it ideal for use in residential homes, apartments and for commercial applications.

Hickory has been used for centuries in applications where its inherent strength and stiffness have been considered a major advantage in applications including timber engineered elements, cabinetry, sporting goods to everyday products such as axe handles. Hickory is extremely stable with excellent hardness characteristics, approx. 9.5kN JANKA scale, similar to popular Australian timbers, Blackbutt & Jarrah.

- ✔ Engineered construction, patented Uniclic Drop Loc profile.
- ✔ Visual appearance will suit those seeking a classic hardwood in a range of natural or stained décors.
- ✔ Wear resistant pre-finished European water-based UV Lacquer, matte sheen level.
- ✔ VOC Emissions: <E1. Below World Health Organisation (WHO) levels. Allergy Free.
- ✔ Hickory rustic grade, a natural look with lots of characters and appeal.
- ✔ Australian Fire & Slip Test certified. Suitable for install over Hydronic in-slab heating only.

COPPER STILL



WARMTH AND CHARACTER SHINE THROUGH



Moonshine



Snowflake



Morning Mist



Natural



Copper Still



Whiskey Barrel



Smokey Peat



Toasted Rye



Double Char



TOASTED RYE



MORNING MIST

TECHNICAL SPECIFICATIONS

Description

Engineered Multi-layer Construction, solid Hickory wear layer.

Size & Length

189 mm width, 14 mm thickness.

2 mm Solid Hickory wear layer.

1900 mm set length & nested shorts approx. 30%.

Grade & Surface

A/B/C/D grade. Allows for rustic features, contains knots & splits that are filled to compliment surface colour and character along with sapwood, raised grain and colour streaks that enhance its rustic charm. Light brushed surface, pre-finished European PU Matte coating. P3 Slip Test Certified.

Profile

Micro bevelled edges. Uniclic patented Drop Loc for fast & efficient floating install.



ELK FALLS
HARDWOOD
GENUINE APPALACHIAN HICKORY

HICKORY



**Preference Floors
Adelaide**
t +61 8 8262 2774
sa@preferencefloors.com.au

**Preference Floors
Brisbane**
t +61 7 3875 1688
qld@preferencefloors.com.au

**Preference Floors
Melbourne**
t +61 3 9794 5111
vic@preferencefloors.com.au

**Preference Floors
Perth**
t +61 8 9471 7785
wa@preferencefloors.com.au

**Preference Floors
Sydney**
t +61 2 9738 1188
sales@preferencefloors.com.au

www.preferencefloors.com.au